

## Features


- Sources and reads milliamps
- 24 Volt internal loop-power
- Powers and reads two-wire transmitters
- Reads and simulates dp-transmitters
- Fixed calibration currents
- Auto-stepping for handsfree calibration
- Auto-ramp cycling for endurance tests
- Fixed currents for valve stroking



## UPS II

### Druck Smart Loop Calibrator for Milliamps

UPS II is a Druck product.  
Druck has joined other GE  
high-technology sensing  
businesses under a new  
name—GE Industrial, Sensing.

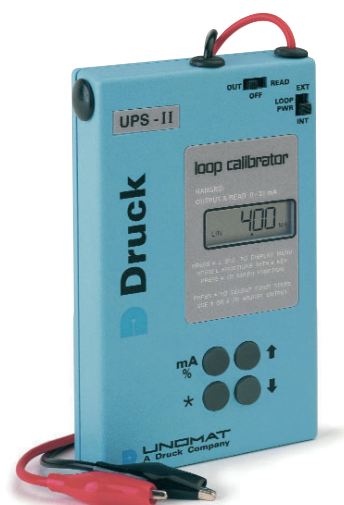

# UPS II Specifications

**Output Range**

0 to 21.00 mA

**Input Range**

0 to 21.00 mA

**Accuracy**

0.05% of range

**Resolution**

10 microamps

**Temperature Effect**

0.0015% /°F (0.003% /°C)

**Internal Loop-Power**

24 VDC stabilized

**External Loop-Power**

56 VDC maximum

**Measurement Input**

12  $\Omega$  including fuse

**Drive Capability**

900  $\Omega$

**Operating Temperature**

15°F to 120°F (-10°C to 50°C)

**Battery Life**

- Sources 12 mA: 13 hours
- Measures: 64 hours

**Batteries**

4x 1.5V AA Batteries

**Loop Mismatch**

Flashes "loop"

**Low Battery**

Flashes "lobat"

**Overrange**

Flashes "EEEE"

**Reversed Polarity**

Flashes "pol"

**Housing**

High impact ABS

**Size**

3 in x 5 in x 0.83 in (77 mm x 124 mm x 21 mm)

**Weight**

9 oz (285 g) including batteries

The UPS II can power (24 VDC) and read two-wire transmitters to perform field calibrations. Output currents are adjustable to a resolution of 10 microamps in both source and transmitter simulation modes.

**Fixed Steps**

The calibrator can source or simulate fixed calibration currents to test or calibrate receivers and to stroke valves. Different current levels are available from the menu.

- 4 to 20 mA linear 4, 8, 12, 16, 20 mA
- 0 to 20 mA linear 0, 5, 10, 15, 20 mA
- 4 to 20 mA sq.rt (flow) 4, 5, 8, 13, 20 mA
- 0 to 20 mA sq.rt (flow) 0, 1.25, 5, 11.25, 20 mA
- 4 to 20 mA 3.8, 4, 4.2, 12, 19, 20, 21 mA

Output currents can be changed manually or automatically. The time between steps is 10 seconds in the auto-stepping mode. In the valve mode, auto-stepping will be:

3.8, 4, 4.2 or 19, 20, 21 mA

**Ramping**

The calibrator can source or simulate with high resolution a continuous up/down cycle between 4 and 20 mA or 0 and 20 mA. The travel time between limits is 60 seconds.

**Reading in Percentage**

The calibrator can display readings in percentage of a 4 to 20 mA or 0 to 20 mA span and can also read or simulate dP-transmitters directly in percentage of flow.

# UPS II Specifications

## Ordering Information

Model UPS II (includes carrying case, set of batteries, instruction guide and spare fuse).

Optional line adaptor:

- 110V/60Hz part number 13602
- 230V/50Hz available as part number 13600

©2006 GE. All rights reserved.  
920-353A\_E

All specifications are subject to change for product improvement without notice. GE® is a registered trademark of General Electric Co. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with GE.